


## Heat Shrink Termination Kits 1-36kV

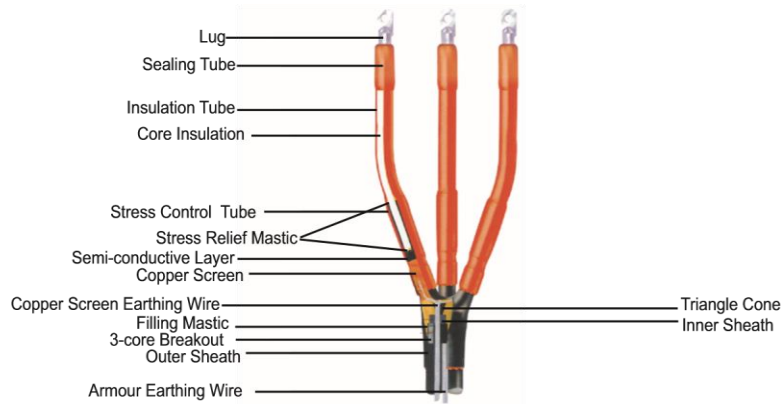

10KV Indoor Heat Shrinkable 3-core Termination

### Selection Table

Voltage	Cores	Cross Section / mm <sup>2</sup>	Product No.	
			Indoor Termination	Outdoor Termination
18/30kV(36)	3, 1	35-50	18/30kVRSNY-3/1(1/1)	18/30kVRSWY-3/1(1/1)
		70-120	18/30kVRSNY-3/2(1/2)	18/30kVRSWY-3/2(1/2)
		150-240	18/30kVRSNY-3/3(1/3)	18/30kVRSWY-3/3(1/3)
		300-400	18/30kVRSNY-3/4(1/4)	18/30kVRSWY-3/4(1/4)
		500-630	18/30kVRSNY-3/5(1/5)	18/30kVRSWY-3/5(1/5)
12/20kV(24)	3, 1	35-50	12/20kVRSNY-3/1(1/1)	12/20kVRSWY-3/1(1/1)
		70-120	12/20kVRSNY-3/2(1/2)	12/20kVRSWY-3/2(1/2)
		150-240	12/20kVRSNY-3/3(1/3)	12/20kVRSWY-3/3(1/3)
		300-400	12/20kVRSNY-3/4(1/4)	12/20kVRSWY-3/4(1/4)
		500-630	12/20kVRSNY-3/5(1/5)	12/20kVRSWY-3/5(1/5)
8.7/15kV(17.5)	3, 1	25-50	8.7/15kVRSNY-3/1(1/1)	8.7/15kVRSWY-3/1(1/1)
		70-120	8.7/15kVRSNY-3/2(1/2)	8.7/15kVRSWY-3/2(1/2)
		150-240	8.7/15kVRSNY-3/3(1/3)	8.7/15kVRSWY-3/3(1/3)
		300-400	8.7/15kVRSNY-3/4(1/4)	8.7/15kVRSWY-3/4(1/4)
		500-630	8.7/15kVRSNY-3/5(1/5)	8.7/15kVRSWY-3/5(1/5)
6/10kV(12)	3, 1	25-50	6/10kVRSNY-3/1(1/1)	6/10kVRSWY-3/1(1/1)
		70-120	6/10kVRSNY-3/2(1/2)	6/10kVRSWY-3/2(1/2)
		150-240	6/10kVRSNY-3/3(1/3)	6/10kVRSWY-3/3(1/3)
		300-400	6/10kVRSNY-3/4(1/4)	6/10kVRSWY-3/4(1/4)
		500-630	6/10kVRSNY-3/5(1/5)	6/10kVRSWY-3/5(1/5)
0.6/1kV(1.2)	4, 5, 3, 2, 1	4-6	0.6/1kVRST-4(5,3,2,1)/(-1)	
		10-16	0.6/1kVRST-4(5,3,2,1)/0	
		25-50	0.6/1kVRST-4(5,3,2,1)/1	
		70-120	0.6/1kVRST-4(5,3,2,1)/2	
		150-240	0.6/1kVRST-4(5,3,2,1)/3	
300-400	0.6/1kVRST-4(5,3,2,1)/4			